



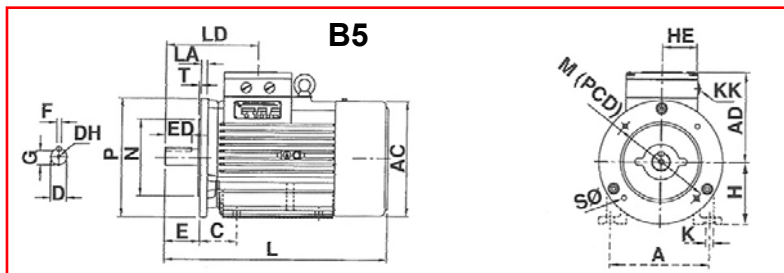

Data sheet for BEVI el-motor type 3D 160 L-4

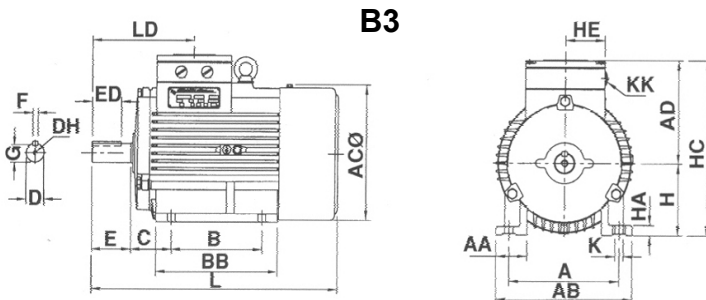

PERFORMANCE DATA

TYPE	POLE	KW	VOLTAGE	Hz	RPM	In-A	I.CL.	IP
160 L-4	4	15	380-420	50	1460	28,5	F	55
160 L-4	4	18	440-480	60	1752	29,7	F	55

	Efficiency	Power factor	Starting current	Starting torque	Breakdown torque	Moment of inertia	Weight
TYPE	η %	$\text{Cos } \varphi$	$\frac{I_s}{I_n}$	$\frac{C_s}{C_n}$	$\frac{C_{max}}{C_n}$	INERTI kg.m2	Kg
160 L-4	89,4	0,85	7,5	2,2	2,3	0,1060	130

DIMENSIONS

A	B	C	D	DH	E	F	G	H	K	L
254	254	108	42	M16	110	12	37	160	15	675

AB	AC	AD	HC
320	320	285	440

	B5 M	B5 N	B5 P	B5 S	B5 T
	300	250	350	19	5

BEARINGS

	DE	NDE
	6309/C3	6309/C3