


**PRODUCT**

**TC 6 400-600-800/5**

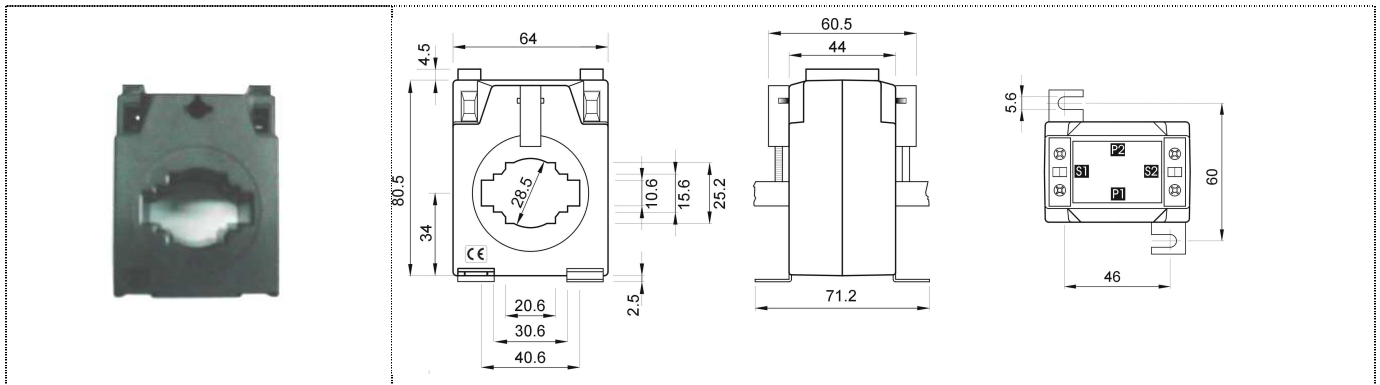

<b>DESCRIPTION</b>	Indoor current transformer
<b>SECONDARY</b>	Terminal TC
<b>Short Circuit Thermal current (Ith)</b>	60 In
<b>DYNAMIC CURRENT (Idyn)</b>	2.5 Ith
<b>ISULATION VOLTAGE</b>	0.72/3/- kv
<b>PRIMARY</b>	Cable. Ø28 mm, Bus-Bar 40x10 mm, 30x15 mm, 25x20 mm
<b>HOUSING</b>	Case TC6. Selfextinguishing black plastic V0 class B(130°C)
<b>ACCESORIES</b>	Fixation TC 6
	Terminal Cover TC 6 (optional)
	DIN rail fixation (optional)
<b>LABELED</b>	Polyester label 26x38 mm TC
<b>PACKING</b>	Box cardboard TC 6 64,7x93,5x45,6 mm.
<b>STANDARD</b>	IEC 60044-1

	<b>RATIO</b>	<b>CL. 1</b>
S1-S2	400/5 A	5VA
S1-S3	600/5 A	5VA
S1-S4	800/5 A	5VA