


PF-35A29EPD-24VQ

PF-35A29EPD-48VQ	48	V
PF-35A29EPD-110Q	110	V
PF-35A29EPD-220Q	220	V



Dimensions and Material

Unit : mm

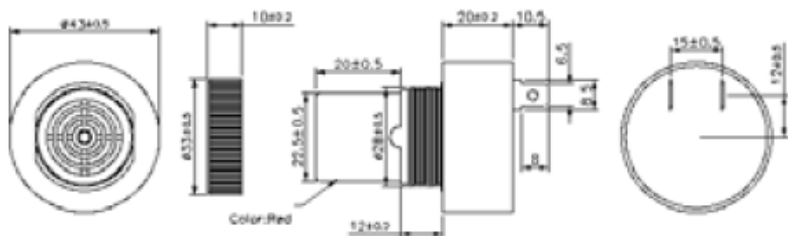

Pin Type

Electrical Characteristics

Oscillation Frequency	2.9 ± 0.5	KHz
Operating Voltage (Vdc/AC)	6 ~ 28(AC/DC)	V
Rated Voltage (Vdc/AC)	24	V
Current Consumption (Max)	20 at Rated Voltage	mA
Sound Pressure Level (Min)	90 at 30cm at Rated Voltage	dB
Tone / Pulse Rate	Fast Pulse $3.0 \pm 20\%$	Hz
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-30 ~ +80	°C