

How to order

K22 - 02 - G
 ① ② ③

① Coil type

	Width	Model
K15	15mm	KS105, KY15, KY18
K18	18mm	KS210
K22	22mm	KS320, KS530, KS640, KS760, KS342, KS534, KJAS, KST

② Voltage

01	AC 100/110V 50/60Hz
02	AC 200/220V 50/60Hz
03	DC 24V
04	DC 12V
05	AC 24V
06	AC 48V
07	DC 48V
08	DC 100V
09	DC 6V


③ Coil

DC	DIN coil (only)
D	DIN coil (Coil + connector)
D1	
Z	
M	
DUL	
ZUL	DIN coil (UL Approval)
GL	Lead wire + lamp
G	Lead wire
DEXT4	Explosion proof coil II 2 G Ex mb IIC T4 II 2 D Ex mb tb IIIC T130°C
GU	Lamp with 90° plug(400mm)
GP	Lamp with 180° plug(400mm)

④ Connector

DN	DIN connector (only)
DN1	DIN connector (1/2) (only)
ZN	DIN connector + lamp + Surge suppressor (only)
MN	Metal DIN connector (only)
	DIN connector
	DIN connector(1/2)
	DIN connector + lamp + Surge suppressor
	Metal DIN connector
	DIN connector
	DIN connector + lamp + Surge suppressor

Coil & Connector- K15

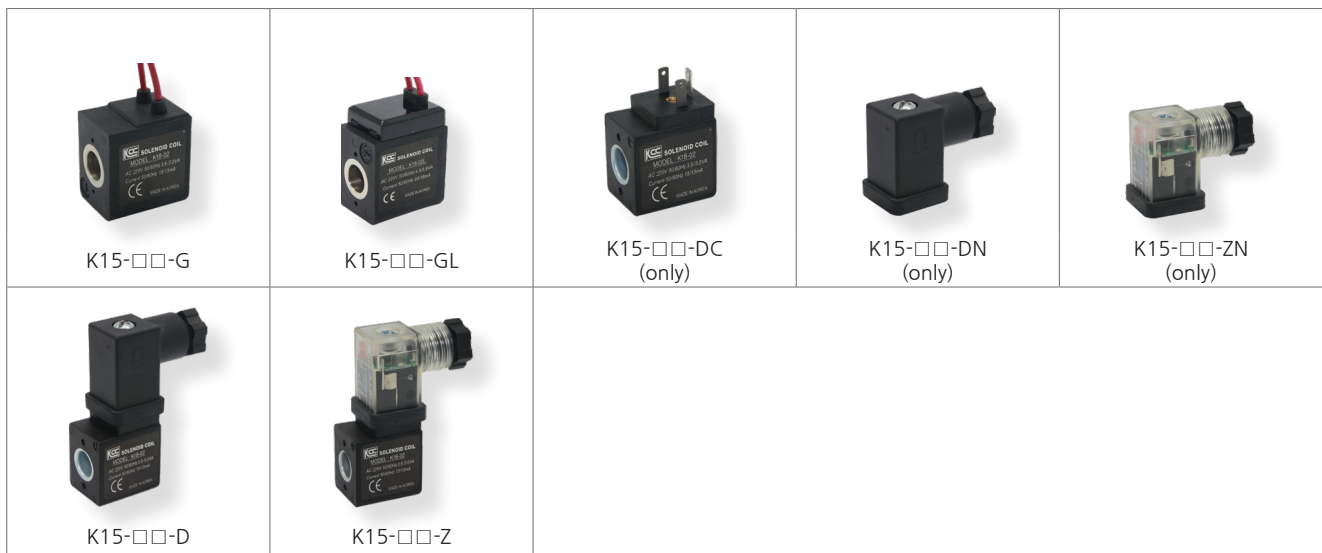

Coils & Connectors- K18

				
K18-□□-G	K18-□□-GL	K18-□□-DC (only)	K18-□□-DN (only)	K18-□□-ZN (only)
				
K18-□□-D	K18-□□-Z			

Coils & Connectors- K22

				
K22-□□-G	K22-□□-GL	K22-□□-GU	K22-□□-GP	K22-□□-DEXT4
				
K22-□□-DC (only)	K22-□□-DN (only)	K22-□□-DN1 (only)	K22-□□-ZN (only)	K22-□□-MN (only)
				
K22-□□-D	K22-□□-D1	K22-□□-Z	K22-□□-M	

Connector drawing

K18-□□-ZN
(Lamp + Surge Killer + DIN Connector)

K22-□□-ZN
(Lamp + Surge Killer + DIN Connector)

K18-□□-DN
(DIN Connector)

K22-□□-DN
(DIN Connector)

K22-□□-DN1
(DIN Connector -1/2)

K22-□□-M
(Metal DIN connector)

Explosion-proof coil drawing

