

PRESSURE SWITCH TYPE HED 2

WK 450 239

up to 21 MPa

03.2012




Pressure switch type HED 2 is used to switch an electrical circuit on and off in relation to the given pressure value of an oil or another operating medium.

DESCRIPTION OF OPERATION

Increasing pressure is supplied by a dumping tube via connector Stecko 4 sealed with the rubber ring 8. This pressure affects the bourdon tube 2 causing its deformation. As soon as the set pressure is reached, the bourdon tube actuates the micro switch 3 by means of the attached operating lever. Position of the micro switch and than time of its action may be adjusted steplessly by means of a lockable handknob. Connection of the pressure switch with an external electrical equipment is made by conductors attached to the terminal strip 6 and the gland 7 - in basic version.

The switch is susceptible to vibration and for that reason it is mounted with the buffers 9.

The pressure switches are designed for the following pressure ranges : 2,5; 6,3; 10; 20 MPa

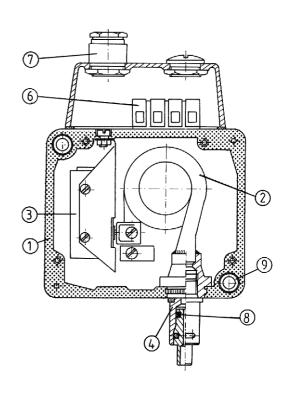


TECHNICAL DATA

Operatin medium	Mineral oil, phosphate ester, gas, air				
Electrical connection with a gland	PG 11 ; max conductor dia = 8				
Insulation	Electrical connection with a gland				
	IP 55		IP 54		
Mounting position	Optional Fixing by 2 bolts M5 x 20 - 5.8 per PN-85/M - 82215 (DIN - 384)				
Switching accuracy	± 1 %				
Switching frequency	30/min				
Contact loading	AC voltage		DC voltage		
	[V]	[A]	[V]	[A]	
	460	10	25 125 250	1.0 0.2 0.1	
Weight	1 kg				


Setting ranges [MPa]			Fixed switching		Maximum operating	
Decreasing pressure		Increasing	Increasing pressure		pressure Pressure rating difference [MPa]	
min	max	min	max	[MPa]	[4.]	pressure [MPa]
0.15	2.5	0.2	2.6	~ 0.05	2.5	3
0.4	6.3	0.5	6.4	~ 0.10	6.3	7
0.6	10	0.75	10.15	~ 0.15	10	11
1	20	1.4	20.4	~ 0.40	20	21

Note: Fixing bolts have to be ordered separately.


WK 450 239 03.2012 -2- Type HED2

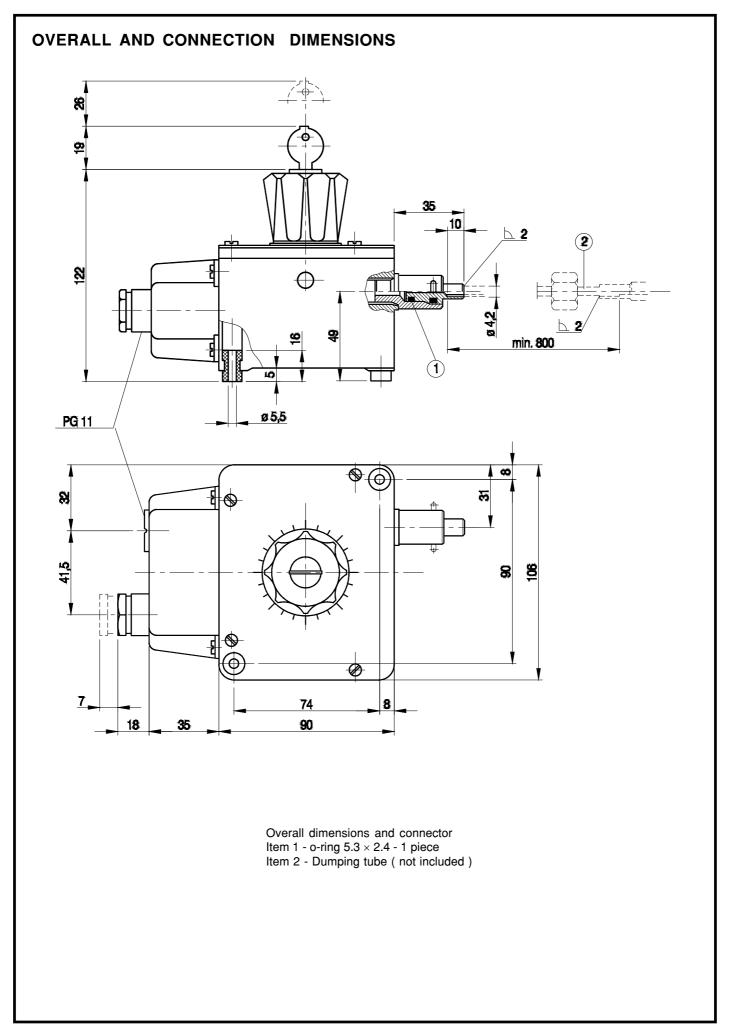


Electrical connection

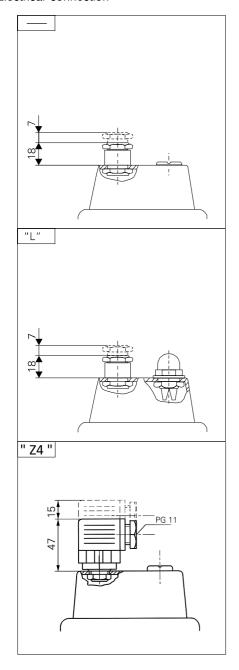

SCHEMES




Graphical symbol



Symbol of electrical connections for version Z4L

Example of application




Simple switching with one HED

HOW TO ORDER

Orders coded in the way showed below should be forwarded to the manufacturer.

The symbols in bold are preferred versions in short delivery time.

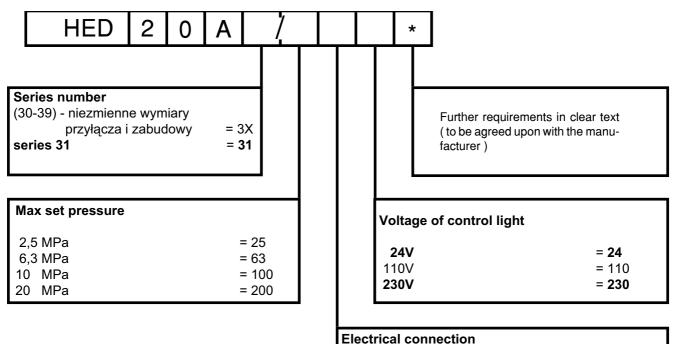

Standard version = no designation

= L Control light Angled plug ISO 4400 without LED = Z4 Angled plug ISO 4400 with LED = Z4L

Coding example: HED 2 0 A 31/200 Z4 230

-5-WK 450 239

PONAR Wadowice S.A. ul. Wojska Polskiego 29 34-100 Wadowice tel. +48 33 488 21 00 fax.+48 33 488 21 03 www.ponar-wadowice.pl	PON	AR [®] vice